

ASSEMBLY and USE INSTRUCTIONS EAN code 4041103831654/4041103831661

General safety instructions for product use and operation



Caution:

1. Read the following instruction thoroughly before unpacking the luminary and starting its installation.
 - Important! Read this instruction carefully. Retain the operating instruction for later use.
 - This product is intended for use in a private household, not for commercial or industrial use!
2. PLS note that all kind of work within electrical appliances shall be proceeded only by a professional electrician.
3. Whenever you give the luminary product to the third person always include the corresponding instruction.
4. The product is only intended/allowed for connection to **230 V/50 Hz** Voltage and only with the light sources as indicated in the part called „Technical Parameters“
5. Avoid any damaging or clamping of cable. Cables must be put in such a way that they do not run over sharp edges and are not crushed or subjected to tensile loads.
6. Please do not look directly into light while switching on or operating the illuminator to avoid eye damage.
7. If there are any electrical components or parts broken, have it replaced or repaired only by an authorized electrician.
8. This luminary is intended only for an indoor installation (IP20).
 - not intended to be installed in the surrounding where the explosion and/or fire hazard exists
 - keep the luminary far away from easy flammable substances and/ or objects.
 - do not expose the luminary towards strong impact of warmth, humidity and/ or dust.
9. The luminaire is constructed according to protection class II and does not require a protective conductor



connection.

Warning: Before you start any kind of work within the electrical appliance, you must cut off the current supply at first. Pull out the fuses or switch the current off assuring nobody else switch it back on. Danger of electrical shock!!

Cleaning and Maintenance.

1. Cut off the electrical supply and let the luminary gets completely cooled before you start cleaning it.
2. Clean the luminary with a dry soft cloth.

Repairs



10. **Warning:** PLS note that all kind of work within electrical appliances shall be proceeded only by an authorized electrician.

Technical Parameters:

AC 230 V ~ 50 Hz, DC 24 V Adapter geliefert

DC 24V~50Hz, 1 x LED (**whole lamp**) 35Watt 2600lm , 3000K


DC 24V~50Hz, 1 x LED-Board (**only**) 30Watt 3500lm , 3000K

This product contains a light source of energy efficiency class <F>.

DC 24V~50Hz, 1 x LED (**whole lamp**) 6Watt 360lm , 3000K




DC 24V~50Hz, 1 x LED-Board (**only**) 5Watt 500lm , 3000K




This product contains a light source of energy efficiency class <F>.



Replaceable (LED) light source by a professional.

Replace control gear by a professional.

LED 30W
3500lm
 35W
2600lm
t 30.000h
T_k 3000K
 15.000x
 <1s

LED 5W
500lm
 6W
360lm
t 30.000h
T_k 3000K
 15.000x
 <1s

The CE-conformity declaration to the product is available on our homepage: www-h-p-i.de under point "Produktinfo".

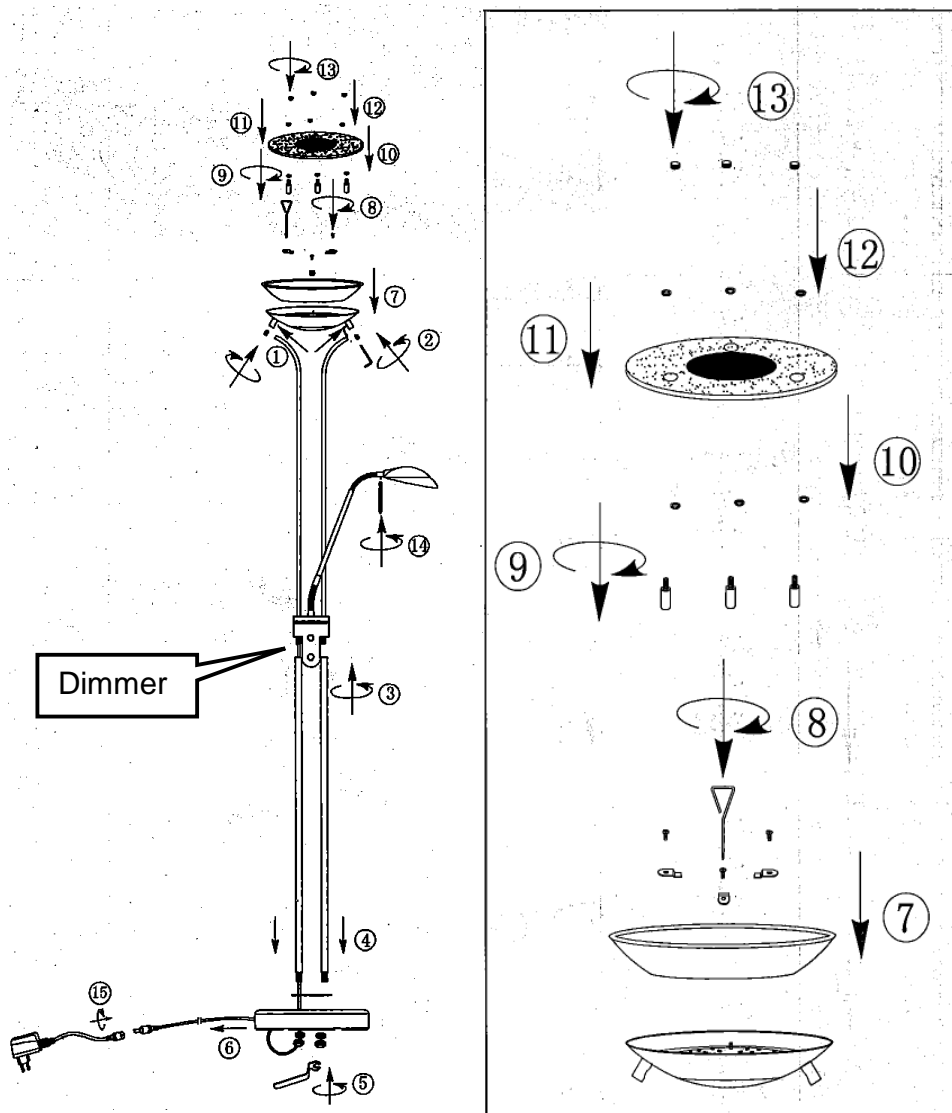
Assembly instruction

1. PLS remove any packaging material from the product and its parts.
2. PLS put the all the delivered parts together step by step, following below given drawing and text.

Waste Disposal of the electrical appliance!

If you decide to get rid of the product one day, be aware that many components are made of valuable raw materials and can be recycled and reused. Never dispose any electrical appliance to the dustbin, but bring it to your Electrical Waste Collecting Plant.

LOT-Nr.: KT24849



- **Connect to the power supply in accordance with national regulations.**

- 1. insert the upper tubes into the brackets on the shield.**
- 2. secure the upper tubes to the screen by tightening the Allen screws with the supplied Allen key. Do not overtighten!**
- 3 Screw the lower tubes clockwise into the bracket towards the upper tubes. Pay attention to this, that the cable is not jammed.**
- 4. Insert the two lower tubes into the lamp base.**
- 5-6 Use the lock nuts to fasten the two lower tubes to the base of the luminaire by pressing the Fasten the counter nuts clockwise using the supplied wrench. Remove the cable slightly from the Tighten the lamp base to ensure that the lamps stand securely on the floor.**
- 7. place the glass shade in the flood bowl.**
- 8. with the enclosed screw clamp and the fastening straps, fasten the glass shade on the Flood bowl.**
- 9. Screw the distance rods onto the heat sink to secure them.**
- 10-11 Place the cover plate on the spacers.**
- 12-13. attach the cover plate to the spacer rods with the nuts.**
- 14. screw the handle for the reading lamp to the underside of the lamp.**
- 15. Connect the DC plug to the cable of the lamp.**

Producer/Importer:


Home Product Import GmbH


Graf-Zeppelin-Straße 5


D- 46149 Oberhausen, www.h-p-i.de




Explanation of the symbols

 Protection class I – the appliance must have their chassis connected to electrical earth by a separate earth conductor coloured green/yellow in most countries

 Protection class II or double insulated electrical appliance is one which has been designed in such a way that it does not require a safety connection to electrical earth (ground)

 Protection class III - A Class III appliance is designed to be supplied from a separated/safety extra-low voltage (SELV) power source

 Required minimal distance between the light source and the illuminated surface (in meter) to be kept



suitable only for low-pressure halogen lamps



only for indoor installation



suitable for outdoor installation (splash proof)



Product fulfils all the valid European directives



At the end of its lifecycle, this product must not be disposed of with your normal waste, but instead must be returned to a recycling facility for electric and electronic devices



With integrated dimmer